



OLED/ LCD Character Interface Board	
Part Number:	MCCMDB-16SILDIL
Version:	1
Date:	19/08/2016
Revision	
Date: 19/08/2016	First Draft
	

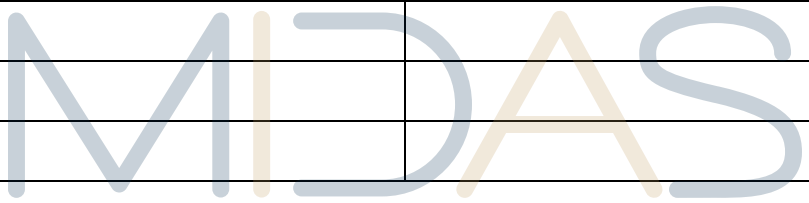

MCCMDB-16SILDIL

LCD / OLED Character display interface board with USB connection

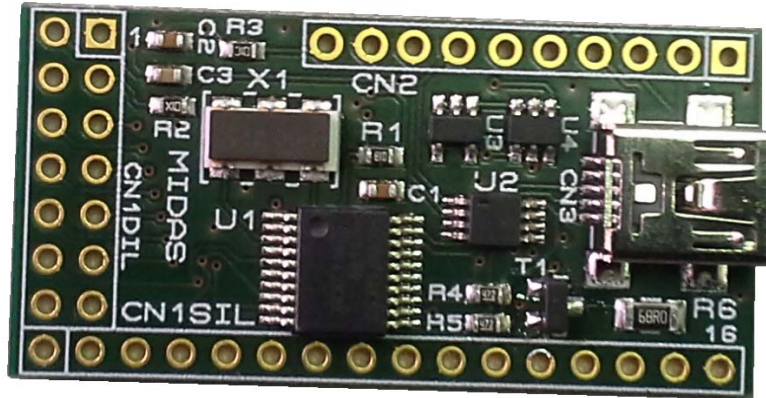

Features:

- Pin compatible with OLED / LCD 16 pin dual in line (DIL) or single in line (SIL) connectors.
- Powered from USB port or separate 5V supply.
- On board temperature measurement.
- On board digital LCD contrast voltage adjustment.
- On board digital LED backlight switch.
- On board LED backlight current limiting resistors.
- Re-programmable via USB port or directly using Microchip ICSP.
- Two general purpose Input Output (IO) ports.
- Windows application for display evaluation.
- Dimensions: 42.0 mm x 21.0 mm



Connections:

CN1DIL 16PIN 0.1" PITCH DIL.	Symbol	Description
1	VSS	Supply 0 volts
2	VDD	Supply +5 volts
3	VO	LCD contrast adjustment voltage
4	RS	RS=0 Command. RS=1 Data
5	R/#W	R/#W=0 Write, R/#W=1 Read
6	E	Enable
7	D0	Data 0
8	D1	Data 1
9	D2	Data 2
10	D3	Data 3
11	D4	Data 4
12	D5	Data 5
13	D6	Data 6
14	D7	Data 7
15	LED+	Switched to +5v via T1 (FET) and R6
16	LED-	Connected to VSS

CN1SIL 16PIN 0.1" PITCH SIL.	Symbol	Description
1	VSS	Supply 0 volts
2	VDD	Supply +5 volts
3	VO	LCD contrast adjustment voltage
4	RS	RS=0 Command. RS=1 Data
5	R/#W	R/#W=0 Write, R/#W=1 Read
6	E	Enable
7	D0	Data 0
8	D1	Data 1
9	D2	Data 2
10	D3	Data 3
11	D4	Data 4
12	D5	Data 5
13	D6	Data 6
14	D7	Data 7
15	LED+	Switched to +5v via T1 (FET) and R6
16	LED-	Connected to VSS

CN2 10PIN 0.1" PITCH SIL.	Symbol	Description
1	VPP	RA3/#MCLR/VPP
2	VDD	Supply +5 volts
3	VSS	Supply 0 volts
4	D+	RA0/D+/PGD
5	D-	RA1/D-/PGC
6	NC	Not Connected
7	IO1	General IO bit 1
8	IO2	General IO bit 2
9	VSS	Supply 0 volts
10	BOOT	Set low for boot mode

CN3 Micro USB.	Symbol	Description
1	VDD	Supply +5 volts
2	D-	USB-
3	D+	USB+
4	NC	Not Connected
5,6,7,8,9	VSS	Supply 0 volts

Command Summary:

Commands are sent to the board via the USB connection which appears to the host as a serial com port i.e. CDC (Communication Device Class) USB to RS232 emulation. All data is interpreted as display data unless preceded with an ESC (1b hex) character.

Name	Byte 1	Byte 2	Byte 3	Byte 4	Description
1b Data	1b	1b	-	-	Send 1b as data.
Display Command	1b	80	CMD	-	Send CMD (command) to display.
Set Contrast	1b	a0	High	Low	Set Contrast voltage (12 bit).
Request Temperature	1b	c0	-	-	5 bytes of ASCII Temperature returned. i.e. sign, hundreds, tens, units
Backlight ON	1b	d0	-	-	Turns Backlight ON
Backlight OFF	1b	d1	-	-	Turns Backlight OFF
Set Port IO direction	1b	e0	DIR	-	IO1=bit0, IO2=bit1. Set to 0 for output. Set to 1 for input (default).
Write Port IO	1b	e1	OP	-	IO1=bit0, IO2=bit1. Set to 0 or 1 as required.
Read Port IO	1b	e2	-	-	Ascii number returned representing I/P state. i.e. 0=both low 1=IO1 high 2=IO2 high 3=both high
Set EEprom Address	1b	f0	Add	-	Set EEprom address. Range from 0 to 255 (0x00 to 0xff).
Write EEprom data	1b	f1	EED	-	Writes data EED to EEprom. At address previously set.
Read EEprom data	1b	f2	-	-	Byte returned from EEprom. From address previously set.


Electrical Specifications:

Absolute Maximum Ratings		
Operating temperature	-30 to +85	°C
Storage temperature	-40 to +125	°C
VDD	6.0	V
All inputs and outputs w.r.t VSS	-0.3 to VDD+0.3	V
Max current source and sunk at OP1&OP2	50	mA

Typical Electrical Characteristics				
Parameter	Min	Typ	Max	Unit
Supply Voltage VDD	2.7	-	5.5	V
Supply Current IDD (board only)	-	16	-	mA
VDD rise time	0.05	-	-	V/ms
LED Backlight voltage	-	-	VDD	V
LED Backlight current	-	-	300	mA
IO Port input low	-	-	0.8	V
IO Port input high	2.0	-	-	V
Contrast Voltage Range	VSS	-	VDD	V
Contrast Voltage Resolution	-	-	4096	Steps
Temperature Measurement Range	-55	-	+125	°C
Temperature Measurement Resolution	9	-	12	Bit



Link Connections:

The MCCMDB-16SILDIL board needs to be configured for either SIL or DIL connection as illustrated below:

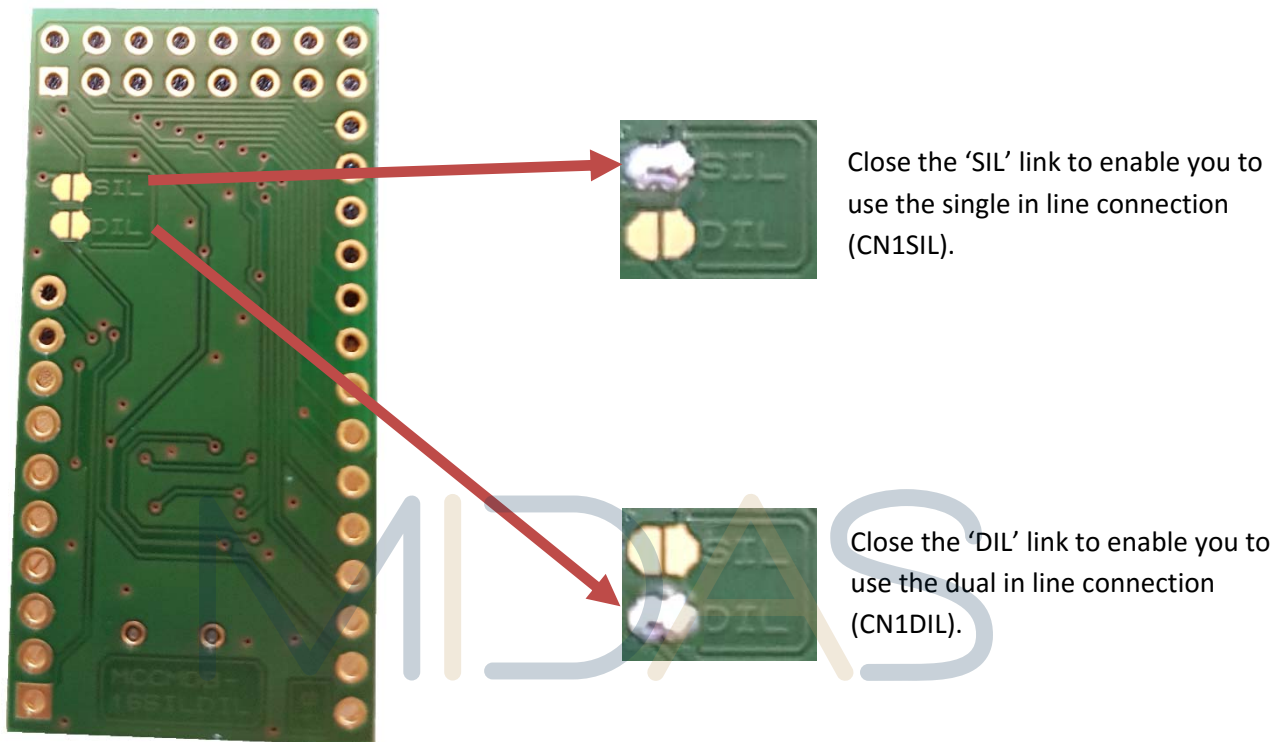

LED Backlight Connection:

The LED Backlight is driven as shown in the circuit below. BKLT is controlled by the on board microcontroller and provides a means of switching the backlight on and off. The LED backlight current is determined by the value of R6 (default 68R 1206) and by the LCD module (if there are current limiting resistors fitted). These need to be calculated according to the LCD module being driven.

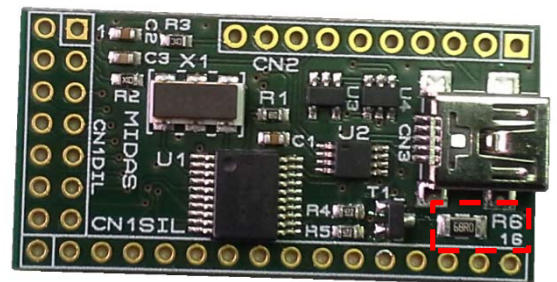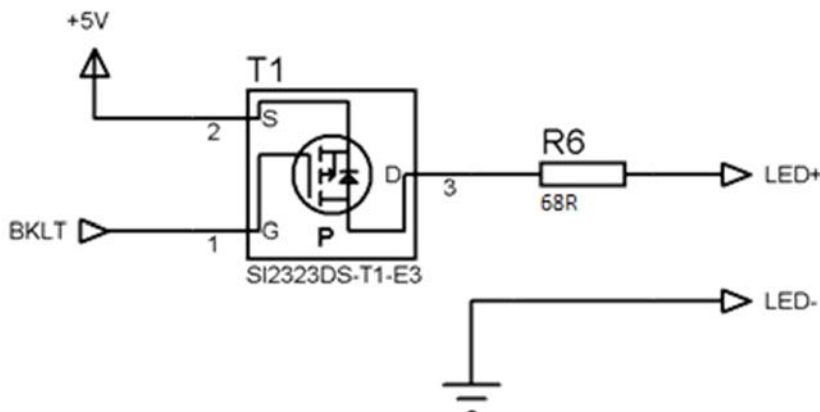

Configuration Type:

On power up the board reads EEprom location 0x00 and applies the following configurations:

Bit 0 = Display Logo on power up. 0=off, 1=on.

Bit 1= LCD / OLED mode. 0=OLED, 1=LCD.


USB Vendor and Product ID Codes:

VID = 0x04D8


PID = 0xF9C3

Windows Application Software for Display Evaluation:

Install file ([Character Module install.msi](#)) available on CD provided.

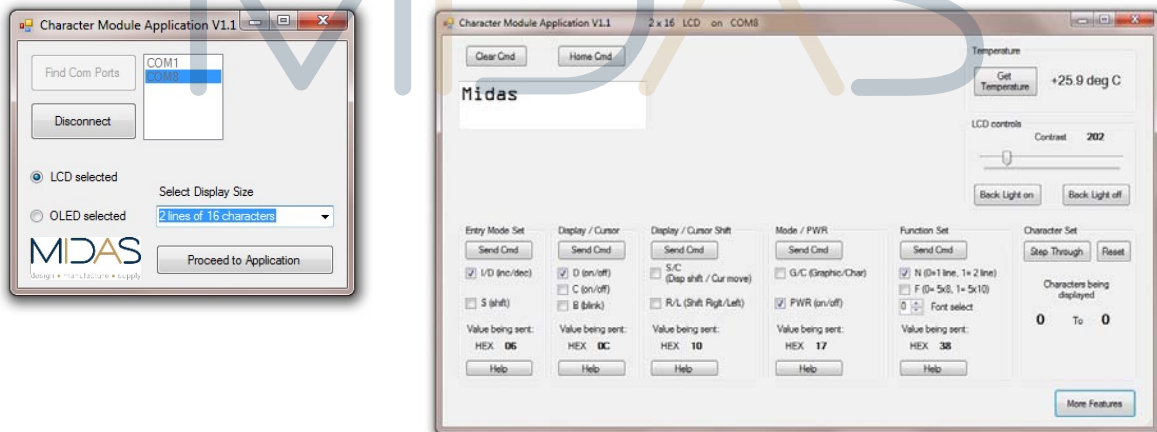

Mechanical Drawing:

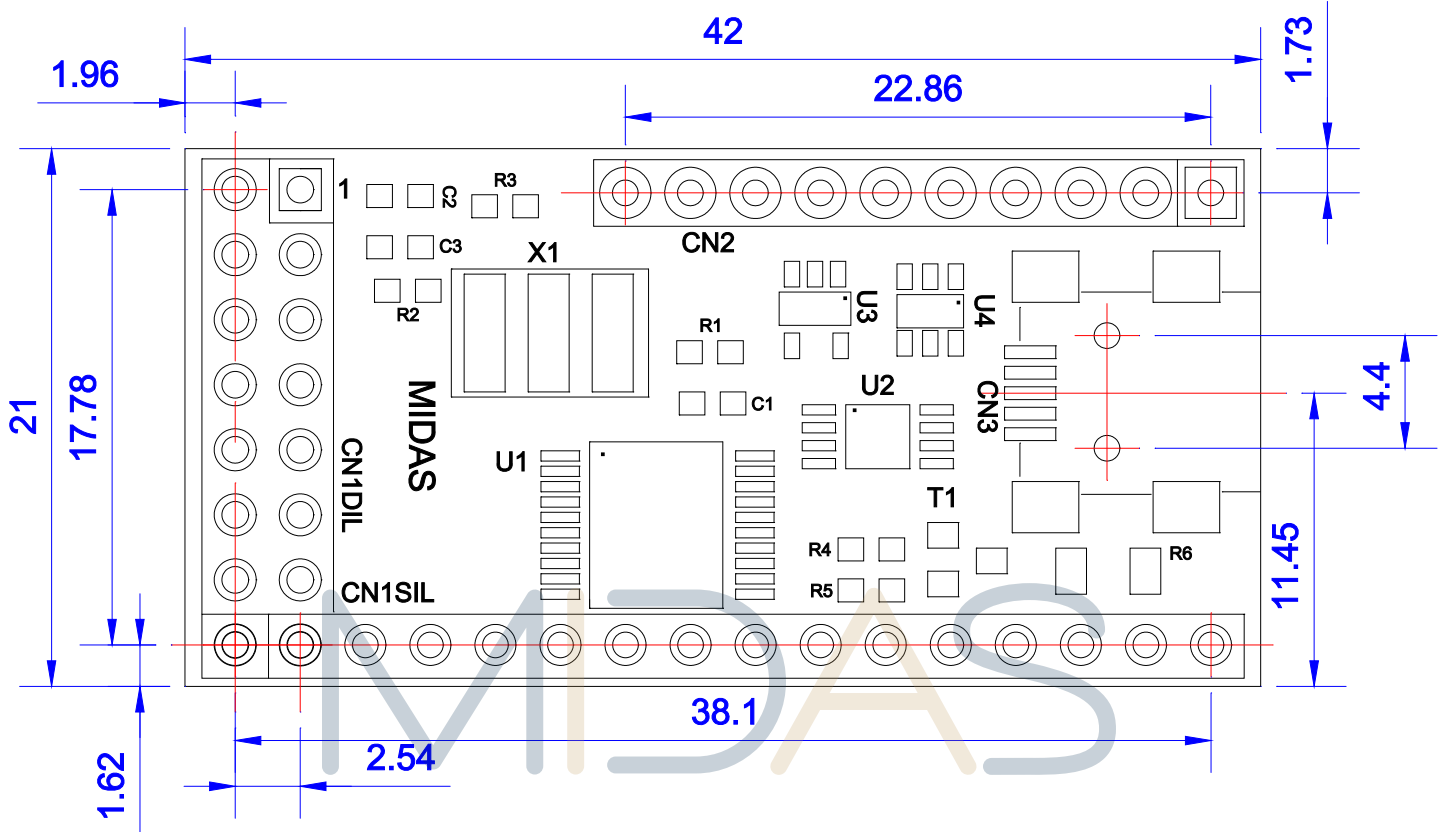

***Note all measurements are in mm
 and all wholes are 0.5mm in radius
 unless stated otherwise.**

Notes:

Anti-static precautions should be observed whilst handling this product.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

MIDAS MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Midas disclaims all liability arising from this information and its use. Use of Midas's products as critical components in life support systems is not authorized except with express written approval by Midas. No licenses are conveyed, implicitly or otherwise, under any Midas intellectual property rights.