

|                      |        |                      |            |
|----------------------|--------|----------------------|------------|
| MC11605A6WR-FPTLW-V2 | 1 x 16 | 5mm Character Height | LCD Module |
| Specification        |        |                      |            |
| Version: 1           |        | Date: 29/09/2016     |            |
| Revision             |        |                      |            |
|                      |        |                      |            |

| Display Features      |                          |  |                  |
|-----------------------|--------------------------|--------------------------------------------------------------------------------------|------------------|
| Character Count       | 1 x 16                   |                                                                                      |                  |
| Appearance            | Black on White           |                                                                                      |                  |
| Logic Voltage         | 5V                       |                                                                                      |                  |
| Interface             | Parallel                 |                                                                                      |                  |
| Font Set              | English / Russian        |                                                                                      |                  |
| Display Mode          | Transflective            |                                                                                      |                  |
| Character Height      | 6.56mm                   |                                                                                      |                  |
| LC Type               | FSTN                     |                                                                                      |                  |
| Module Size           | 80.00 x 36.00 x 13.50 mm |                                                                                      |                  |
| Operating Temperature | -20°C ~ +70°C            |                                                                                      |                  |
| Construction          | COB                      | Box Quantity                                                                         | Weight / Display |
| LED Backlight         | White                    | 45 pcs                                                                               | 28.88 grams      |


\* - For full design functionality, please use this specification in conjunction with the ST7066U specification. (Provided Separately)

| Display Accessories      |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| Part Number              | Description                                                                                          |
| MCCMDB-16SIL             | LCD Interconnect board, can be driven from either a PC or a single Board computer with a USB output. |
| MCCBL1A16SLIP-16DILS-150 | 16 Way, Single in-line to Dual In-line connector Cable.                                              |
| MCCBL1A16SLIP-SILS-150   | 16 Way, Single In-line to Single in-Line connector Cable.                                            |

| Optional Variants  |                                        |         |
|--------------------|----------------------------------------|---------|
| Fonts              | Appearances                            | Voltage |
| English / European | Black on Yellow/Green<br>White on Blue |         |

## Mechanical Specifications

|                |                                         |          |                 |               |              |
|----------------|-----------------------------------------|----------|-----------------|---------------|--------------|
| Module Size    | 80.00 x 36.00 x 13.50 ( With Backlight) |          |                 |               | W x H x D mm |
| Viewing Area   | 64.50 x 13.80                           | W x H mm | Hole-to-Hole    | 75.00 x 31.00 | W x H mm     |
| Character Size | 3.07 x 6.56                             | W x H mm | Character Pitch | 0.70          | W mm         |
| Dot Size       | 0.55 x 0.75                             | W x H mm | Dot Pitch       | 0.08 x 0.08   | W x H mm     |

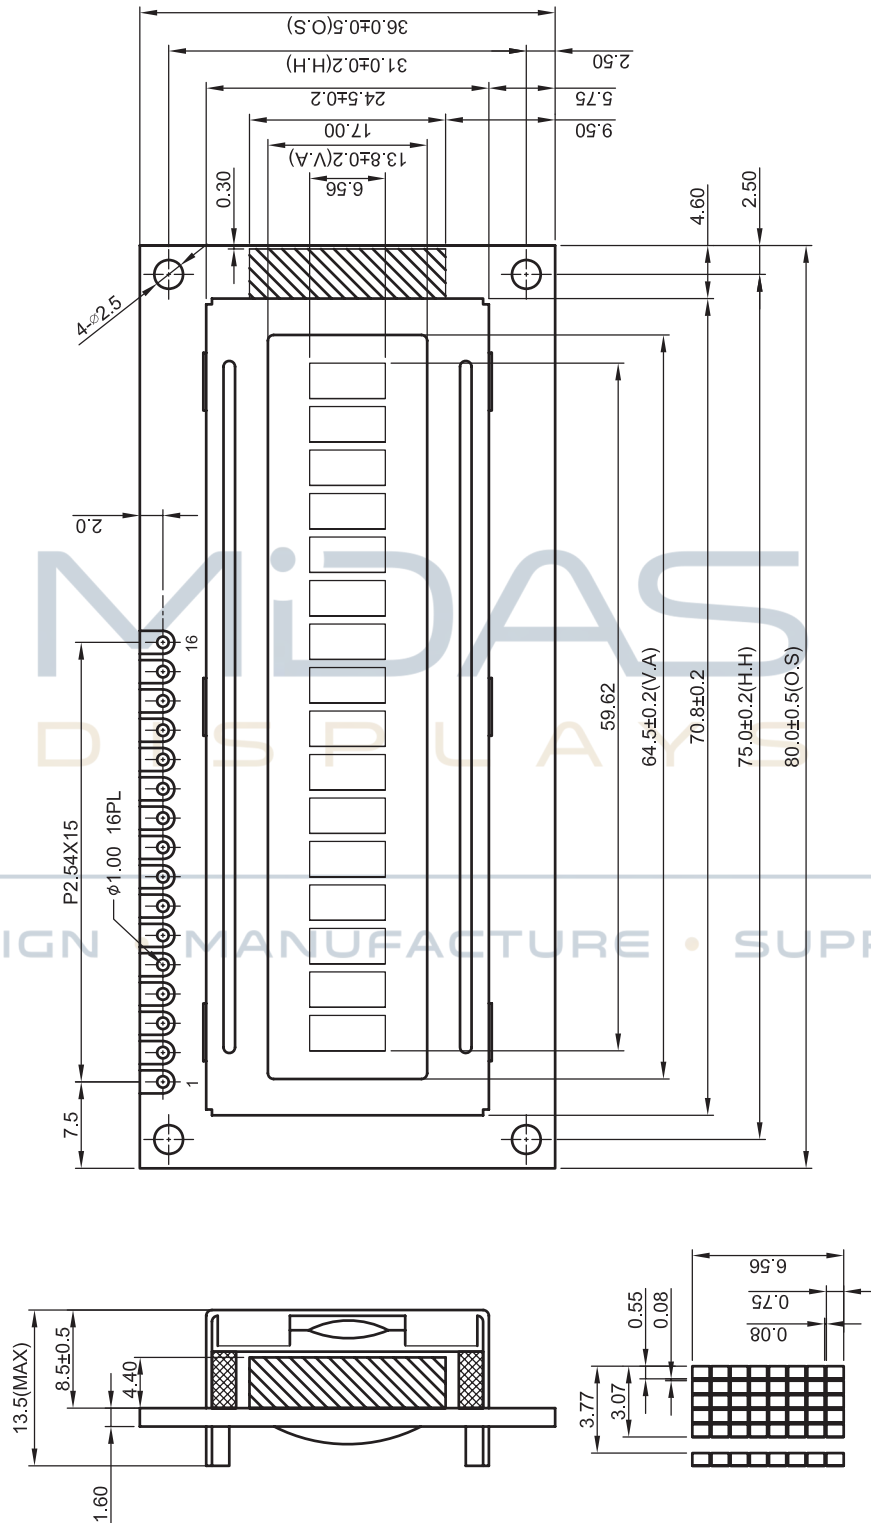


|                      |        |                      |            |
|----------------------|--------|----------------------|------------|
| MC11605A6WR-FPTLW-V2 | 1 x 16 | 5mm Character Height | LCD Module |
| Specification        |        |                      |            |
| Version: 1           |        | Date: 29/09/2016     |            |
| Revision             |        |                      |            |
|                      |        |                      |            |


## Pin Layout

| PI | SYMBOL | DESCRIPTION            | REMARKS |
|----|--------|------------------------|---------|
| 1  | Vss    | GND                    |         |
| 2  | Vdd    | Power supply for LCM   | 5.0V    |
| 3  | V      | Contrast Adjust        |         |
| 4  | RS     | Register Select Signal |         |
| 5  | R/W    | Data Read /Write       |         |
| 6  | E      | Enable Signal          |         |
| 7  | DB0    | Data bus line          |         |
| 8  | DB1    | Data bus line          |         |
| 9  | DB2    | Data bus line          |         |
| 10 | DB3    | Data bus line          |         |
| 11 | DB4    | Data bus line          |         |
| 12 | DB5    | Data bus line          |         |
| 13 | DB6    | Data bus line          |         |
| 14 | DB7    | Data bus line          |         |
| 15 | LED+   | Power supply for BKL   | 5.0V    |
| 16 | LED-   | Power supply for BKL   |         |

### Block Diagram

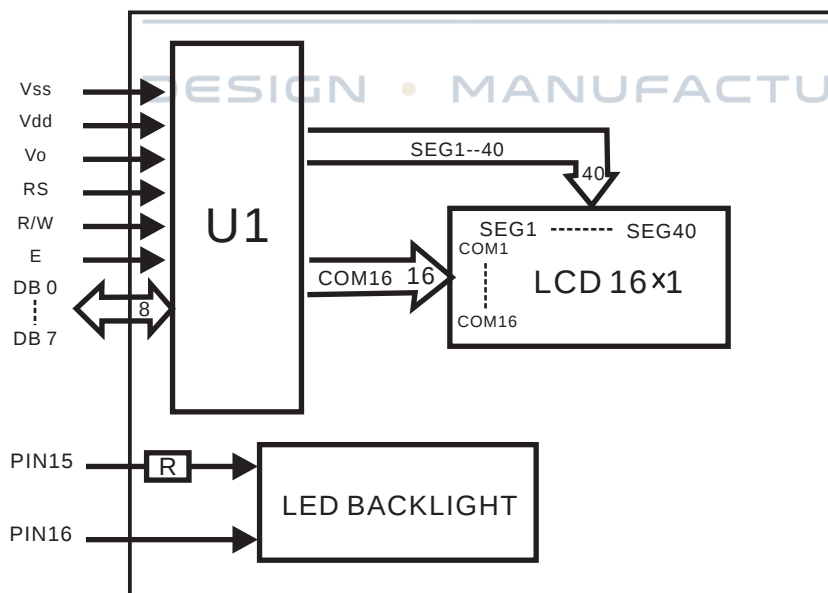

### Power Supply Diagram

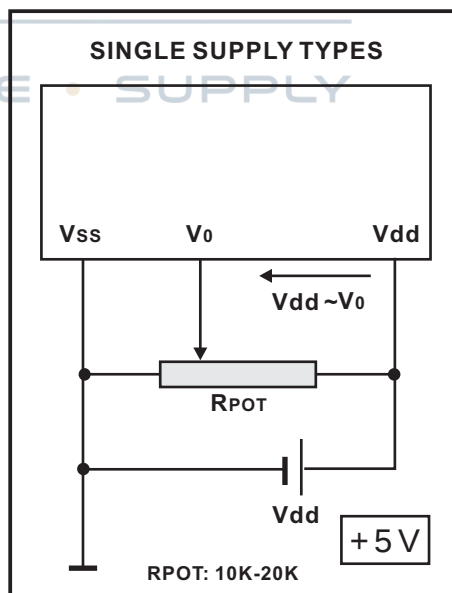

|                      |        |                      |            |
|----------------------|--------|----------------------|------------|
| MC11605A6WR-FPTLW-V2 | 1 x 16 | 5mm Character Height | LCD Module |
| Specification        |        |                      |            |
| Version: 1           |        | Date: 29/09/2016     |            |
| Revision             |        |                      |            |
|                      |        |                      |            |

## Font Map

| Upper<br>4bit<br>Lower<br>4bit | LLLL             | LL LH | LL HL | LL HH | LH LL | LH LH | LH HL | LH HH | HLLL | HLLH | HL HL | HL HH | HH LL | HH LH | HH HL | HH HH |
|--------------------------------|------------------|-------|-------|-------|-------|-------|-------|-------|------|------|-------|-------|-------|-------|-------|-------|
| LLLL                           | CG<br>RAM<br>(1) |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LL LH                          | (2)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LL HL                          | (3)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LL HH                          | (4)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LH LL                          | (5)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LH LH                          | (6)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LH HL                          | (7)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| LH HH                          | (8)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HLLL                           | (1)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HLLH                           | (2)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HL HL                          | (3)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HL HH                          | (4)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HH LL                          | (5)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HHLH                           | (6)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HH HL                          | (7)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |
| HH HH                          | (8)              |       |       |       |       |       |       |       |      |      |       |       |       |       |       |       |

|                      |        |                      |            |
|----------------------|--------|----------------------|------------|
| MC11605A6WR-FPTLW-V2 | 1 x 16 | 5mm Character Height | LCD Module |
| Specification        |        |                      |            |
| Version: 1           |        | Date: 29/09/2016     |            |
| Revision             |        |                      |            |
|                      |        | Page 4 of 5          |            |

| Absolute Maximum Ratings |        |           |           |     |          |      |
|--------------------------|--------|-----------|-----------|-----|----------|------|
| Item                     | Symbol | Condition | Min       | Typ | Max      | Unit |
| Power Supply ( LOGIC)    | Vdd    | 25°C      | -0.3      | --- | 7.0      | V    |
| Power Supply (LCD)       | V0     | 25°C      | Vdd -13.5 | --- | Vdd +0.3 | V    |
| Input Voltage            | Vin    | 25°C      | -0.3      | --- | Vdd +0.3 | V    |
| Operating Temperature    | Vopr   | ---       | -20       | --- | 70       | °C   |
| Storage Temperature      | Vstg   | ---       | -30       | --- | 80       | °C   |

| Electronic Characteristics    |                   |           |      |      |      |      |
|-------------------------------|-------------------|-----------|------|------|------|------|
| Item                          | Symbol            | Condition | Min  | Typ  | Max  | Unit |
| Input Voltage                 | Vlcm = Vdd        | ---       | ---  | 5.0  | ---  | V    |
| Supply Current                | Idd               | Vdd=5V    | ---  | 1.5  | ---  | mA   |
| Driving Voltage for LCD Panel | Vlcd = (Vdd - V0) | -20 °C    | 4.35 | 4.60 | 4.80 | V    |
|                               |                   | 0 °C      | 4.35 | ---  | 4.75 |      |
|                               |                   | 25 °C     | 4.30 | 4.50 | 4.70 |      |
|                               |                   | 50 °C     | 4.30 | ---  | 4.70 |      |
|                               |                   | 70 °C     | 4.35 | 4.50 | 4.80 |      |

| LCD Characteristics          |                   |           |     |     |     |      |
|------------------------------|-------------------|-----------|-----|-----|-----|------|
| For STN/FSTN LCD Panel Types |                   |           |     |     |     |      |
| Item                         | Symbol            | Condition | Min | Typ | Max | Unit |
| Viewing Angle                | $\Phi 2 - \Phi 1$ | K = 4     | 40° | --- | --- | Deg  |
|                              | $\Theta$          |           | 60° |     |     |      |
| Contrast Ratio               | K                 | ---       | --- | 10  | --- | ---  |
| Response Time (Rise)         | TR                | ---       | --- | 150 | 250 | ms   |
| Response Time (Fall)         | TF                | ---       | --- | 150 | 250 | ms   |

| LED Characteristics          |              |              |      |     |      |                   |
|------------------------------|--------------|--------------|------|-----|------|-------------------|
| Item                         | Symbol       | Condition    | Min  | Typ | Max  | Unit              |
| LED Forward Voltage          | Vf           | 25°C If=15mA | ---  | 5.0 | ---  | V                 |
| LED Forward Current*         | If           | 25°C         | ---  | 15  | ---  | mA                |
| LED Reverse Current          | Ir           | 25 C Vr=5.0V | ---  | --- | 10   | μA                |
| LED Colour Range             | X Coordinate | 25°C If=15mA | 0.26 | --- | 0.30 | ---               |
|                              | Y Coordinate |              | 0.27 | --- | 0.31 | ---               |
| LED Brightness (Without LCD) | Lv           | 25 C If=15mA | ---  | 390 | ---  | cd/m <sup>2</sup> |
| LED Brightness Uniformity    | Lvmin/Lvmax  | 25 C If=15mA | 70   | --- | ---  | Ratio             |
| LED Life Time                | ---          | 25 C If=15mA | 9K   | --- | ---  | Hours             |

**Attention:** It is constant current, not constant voltage, which should be applied when driving the LED backlight, please ensure you adhere to this rule.

|                      |        |                      |            |
|----------------------|--------|----------------------|------------|
| MC11605A6WR-FPTLW-V2 | 1 x 16 | 5mm Character Height | LCD Module |
| Specification        |        |                      |            |
| Version: 1           |        | Date: 29/09/2016     |            |
| Revision             |        |                      |            |
|                      |        |                      |            |

