

|               |            |                  |            |
|---------------|------------|------------------|------------|
| MDT101004C    | 1280 x 800 | MIPI Interface   | TFT Module |
| Specification |            |                  |            |
| Version: 1    |            | Date: 17/05/2019 |            |
| Revision      |            |                  |            |
| 1             | 15/05/2019 | First issue      |            |

| Display Features      |                           |  |                  |
|-----------------------|---------------------------|-------------------------------------------------------------------------------------|------------------|
| Display Size          | 10.1"                     |                                                                                     |                  |
| Resolution            | 1280 x 800                |                                                                                     |                  |
| Orientation           | Landscape                 |                                                                                     |                  |
| Appearance            | RGB                       |                                                                                     |                  |
| Logic Voltage         | 1.8V                      |                                                                                     |                  |
| Interface             | MIPI                      |                                                                                     |                  |
| Brightness            | 250 cd/m <sup>2</sup>     |                                                                                     |                  |
| Touchscreen           | CTP                       |                                                                                     |                  |
| Module Size           | 229.60 x 149.30 x 2.90 mm |                                                                                     |                  |
| Operating Temperature | -20°C ~ +70°C             | Created By                                                                          | Checked By       |
| Pinout                | 39 way FFC                | WE                                                                                  | AB               |
| Pitch                 | 0.3 mm                    | Box Quantity                                                                        | Weight / Display |
|                       |                           | ---                                                                                 | ---              |

\* - For full design functionality, please use this specification in conjunction with the TBD display driver specification.(Provided Separately)

| Display Accessories |                                                                                                                                                                  |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part Number         | Description                                                                                                                                                      |
| MDIB-CC1            | Interconnect board for standard pitch pinouts to fine pitch wires. Providing pinouts for 2.54 pinout. 1.27, 1, 0.845, 0.8, 0.7, 0.65, 0.62, 0.6, 0.5 & 0.3 pads. |
|                     |                                                                                                                                                                  |
|                     |                                                                                                                                                                  |

| Optional Variants |         |
|-------------------|---------|
| Appearances       | Voltage |
|                   |         |
|                   |         |



# 1. General Specification


| Item                           | Contents          | Unit    |
|--------------------------------|-------------------|---------|
| LCD TYPE                       | TFT/TRANSMISSIVE  |         |
| MODULE SIZE (W*H*T)            | 229.6*149.3*2.9   | MM      |
| ACTIVE SIZE (W*H)              | 216.96*135.6      | MM      |
| PIXEL PITCH (W*H)              | 0.1695*0.1695     | MM      |
| NUMBER OF DOTS                 | 1280*800          |         |
| DRIVER IC                      | TBD               |         |
| INTERFACE TYPE                 | MIPI              |         |
| TOP POLARIZER TYPE             | ANTI-GLARE        |         |
| RECOMMEND VIEWING DIRECTION    | ALL               | O'CLOCK |
| GRAY SCALE INVERSION DIRECTION | --                | O'CLOCK |
| COLORS                         | 16.7M             |         |
| BACKLIGHT TYPE                 | 36-CHIP WHITE LED |         |
| TOUCH PANEL TYPE               | CAPACITIVE        |         |

---

DESIGN • MANUFACTURE • SUPPLY



2. Mechanical Drawing

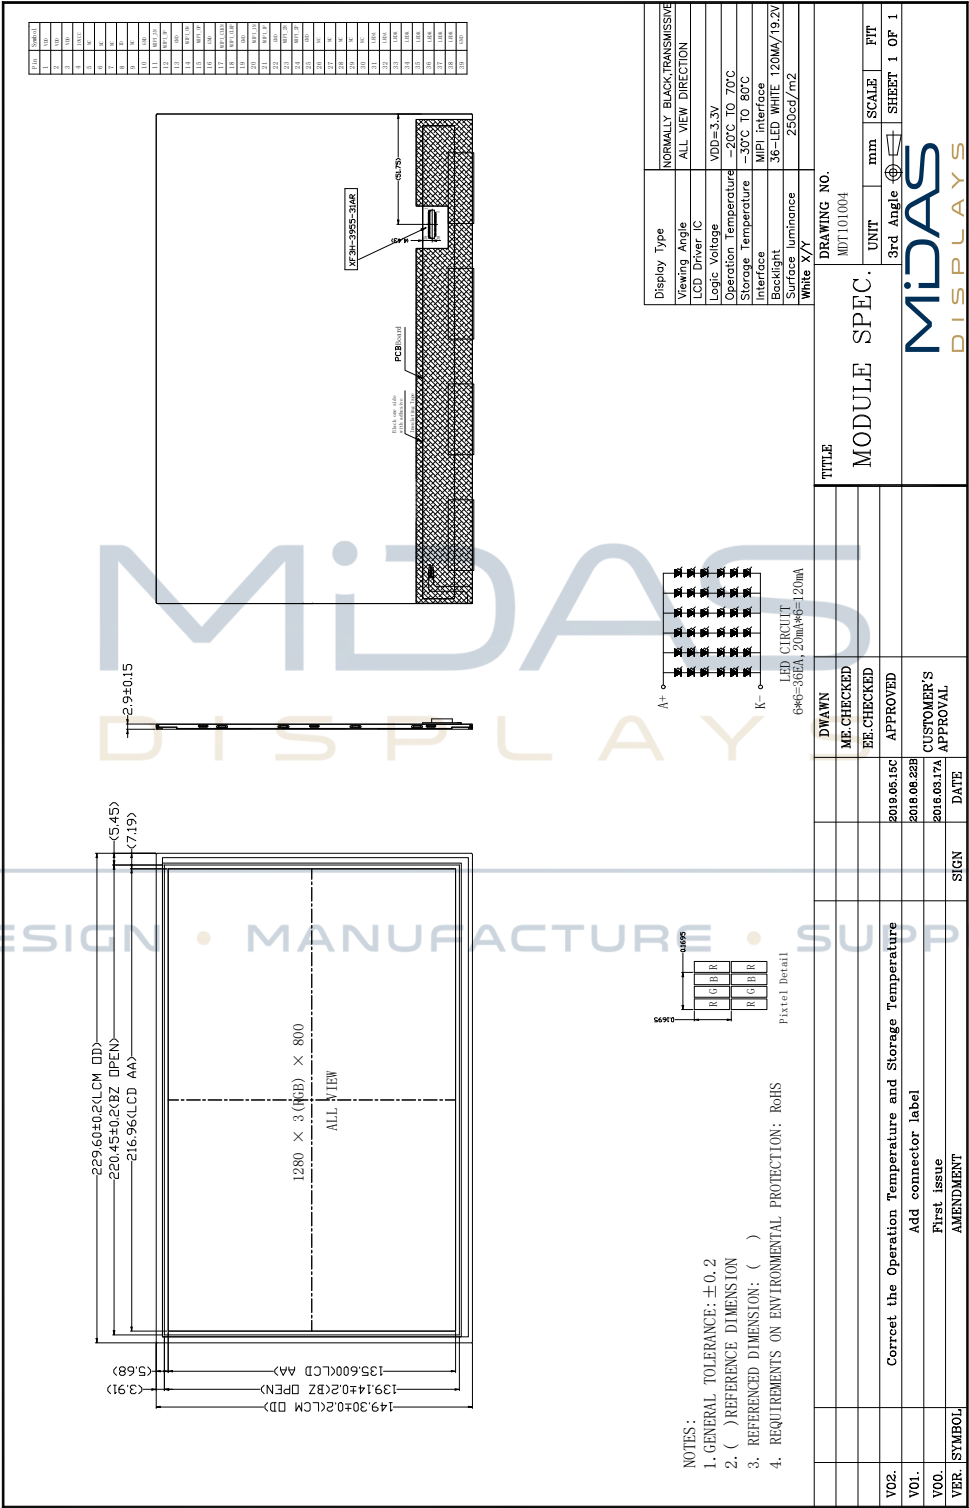


**Touch Panel Drawing available on  
request, please contact  
sales@midasdisplays.com**

---

DESIGN • MANUFACTURE • SUPPLY



### 3. Block Diagram

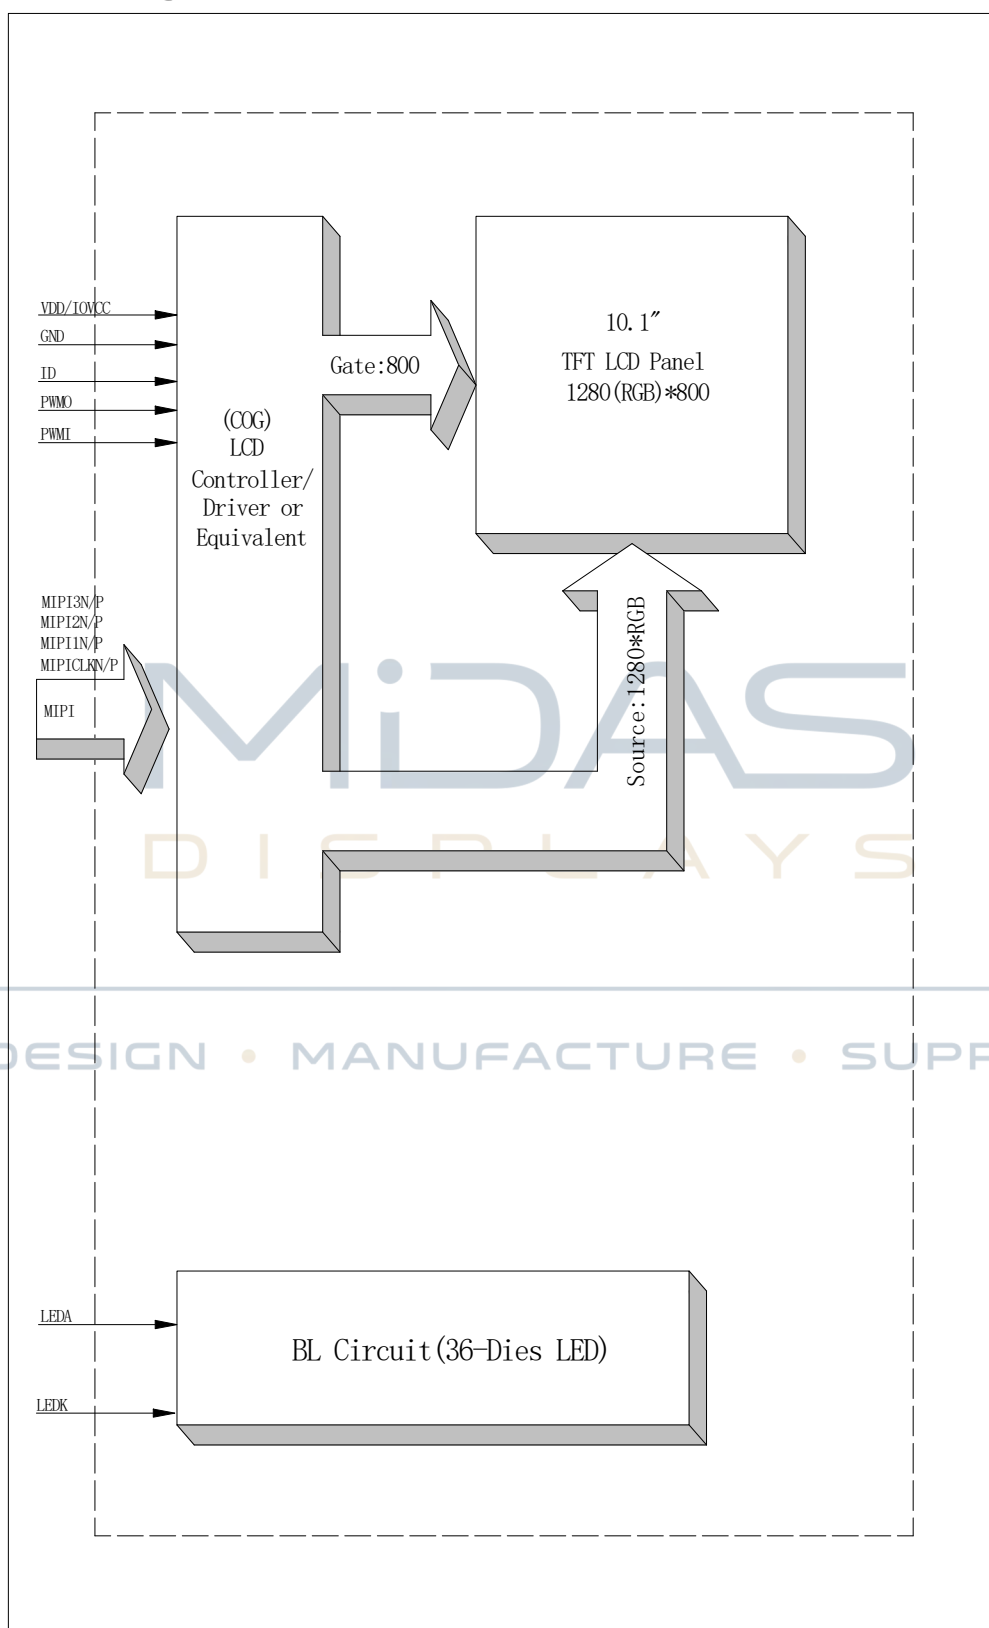

## 4. Interface Pin Function

| Pin No. | Symbol    | Description                     |
|---------|-----------|---------------------------------|
| 1       | VDD       | Logic power 3.3V                |
| 2       | VDD       | Logic power 3.3V                |
| 3       | VDD       | Logic power 3.3V                |
| 4       | IOVCC     | IOVCC(1.8v)                     |
| 5       | NC        | No connection                   |
| 6       | NC        | No connection                   |
| 7       | NC        | No connection                   |
| 8       | ID        | Product ID signal output (1.8V) |
| 9       | NC        | NO CONNECT                      |
| 10      | GND       | GROUND                          |
| 11      | MIPI_3N   | MIPI DATA NEGATIVE SIGNAL(3N)   |
| 12      | MIPI_3P   | MIPI DATA POSITIVE SIGNAL(3P)   |
| 13      | GND       | GROUND                          |
| 14      | MIPI_0N   | MIPI DATA NEGATIVE SIGNAL(0N)   |
| 15      | MIPI_0P   | MIPI DATA POSITIVE SIGNAL(0P)   |
| 16      | GND       | GROUND                          |
| 17      | MIPI_CLKN | MIPI CLK NEGATIVE SIGNAL(CLKN)  |
| 18      | MIPI_CLKP | MIPI CLK POSITIVE SIGNAL(CLKP)  |
| 19      | GND       | GROUND                          |
| 20      | MIPI_1N   | MIPI DATA NEGATIVE SIGNAL(1N)   |
| 21      | MIPI_1P   | MIPI DATA POSITIVE SIGNAL(1P)   |
| 22      | GND       | GROUND                          |
| 23      | MIPI_2N   | MIPI DATA NEGATIVE SIGNAL(2N)   |
| 24      | MIPI_2P   | MIPI DATA POSITIVE SIGNAL(2P)   |
| 25      | GND       | GROUND                          |
| 26      | NC        | NO CONNECT                      |
| 27      | NC        | NO CONNECT                      |
| 28      | NC        | NO CONNECT                      |
| 29      | NC        | NO CONNECT                      |
| 30      | NC        | NO CONNECT                      |
| 31      | LEDA      | LED ANODE                       |
| 32      | LEDA      | LED ANODE                       |
| 33      | LEDK      | LED CATHODE                     |
| 34      | LEDK      | LED CATHODE                     |
| 35      | LEDK      | LED CATHODE                     |
| 36      | LEDK      | LED CATHODE                     |
| 37      | LEDK      | LED CATHODE                     |
| 38      | LEDK      | LED CATHODE                     |
| 39      | GND       | GROUND                          |



## 5. Absolute Maximum Ratings

| Parameter                 | Symbol           | Min  | Max | Unit |
|---------------------------|------------------|------|-----|------|
| Supply voltage for analog | VDD              | -0.3 | 5   | V    |
| Supply voltage for logic  | IOVCC            | -0.5 | 5   | V    |
| Supply current (One LED)  | I <sub>LED</sub> |      | 60  | mA   |
| Operating temperature     | T <sub>OP</sub>  | -20  | 70  | °C   |
| Storage temperature       | T <sub>ST</sub>  | -30  | 80  | °C   |

Note: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

MDAS  
DISPLAYS

---

DESIGN • MANUFACTURE • SUPPLY



## 6. Electrical Characteristics

### 6.1 Input Power

| Item                      | Symbol           | Min     | Typ. | Max     | Unit | Applicable terminal |
|---------------------------|------------------|---------|------|---------|------|---------------------|
| Supply Voltage for Analog | VDD              | 3.0     | 3.3  | 3.6     | V    |                     |
| Supply Voltage for Logic  | IOVCC            | 1.7     | 1.8  | 3.3     | V    |                     |
| Power supply current      | IDD              | 180     | 270  | 380     | MA   |                     |
| Input Voltage             | V <sub>IL</sub>  | GND     | -    | 0.3 VDD | V    |                     |
|                           | V <sub>IH</sub>  | 0.7 VDD | -    | VDD     |      |                     |
| Input leakage Current     | I <sub>LKG</sub> | -       |      | -       | μA   |                     |

### 6.2 Backlight Driving Conditions

| Item                      | Symbol         | Value  |       |      | Unit | Remark                |
|---------------------------|----------------|--------|-------|------|------|-----------------------|
|                           |                | Min.   | Typ.  | Max. |      |                       |
| Voltage for LED Backlight | V <sub>F</sub> | 16.8   | 19.2  | 21   | V    | I <sub>L</sub> =120mA |
| Current for LED Backlight | I <sub>L</sub> |        | 120   |      | mA   |                       |
| Power Consumption         | P              |        | 2.304 |      | W    |                       |
| LED Life Time             |                | 30,000 |       |      | Hr   | Note                  |

Note: Brightness to be decreased to 50% of the initial value at ambient temperature TA=25℃




## 7. Optical Characteristics

| ITEM                 |       | SYMBOL           | CONDITIONS           | SPECIFICATIONS |       |       | UNIT            | NOTE |
|----------------------|-------|------------------|----------------------|----------------|-------|-------|-----------------|------|
|                      |       |                  |                      | MIN            | TYP.  | MAX   |                 |      |
| Luminance            |       | L                | $I_L = 120\text{mA}$ | 200            | 250   | 350   | $\text{Cd/m}^2$ |      |
| Contrast Ratio       |       | CR               | $\theta = 0^\circ$   | 700            | 900   |       |                 |      |
| Response Time        |       | $T_{\text{ON}}$  | $25^\circ\text{C}$   |                | 30    |       | ms              |      |
|                      |       | $T_{\text{OFF}}$ |                      |                |       |       |                 |      |
| CIE Color Coordinate | Red   | $X_R$            | Viewing normal angle | 0.550          | 0.590 | 0.630 |                 |      |
|                      |       | $Y_R$            |                      | 0.313          | 0.353 | 0.393 |                 |      |
|                      | Green | $X_G$            |                      | 0.292          | 0.332 | 0.372 |                 |      |
|                      |       | $Y_G$            |                      | 0.525          | 0.565 | 0.605 |                 |      |
|                      | Blue  | $X_B$            |                      | 0.110          | 0.150 | 0.190 |                 |      |
|                      |       | $Y_B$            |                      | 0.090          | 0.130 | 0.170 |                 |      |
|                      | White | $X_W$            |                      | 0.265          | 0.305 | 0.345 |                 |      |
|                      |       | $Y_W$            |                      | 0.302          | 0.342 | 0.382 |                 |      |
| Viewing Angle        | Hor.  | $\theta_{X+}$    | $\text{CR} \geq 10$  | 80             | 85    |       | Degree          |      |
|                      |       | $\theta_{X-}$    |                      | 80             | 85    |       |                 |      |
|                      | Ver.  | $\theta_{Y+}$    |                      | 80             | 85    |       |                 |      |
|                      |       | $\theta_{Y-}$    |                      | 80             | 85    |       |                 |      |
| Uniformity           | Un    |                  |                      | 70             | 75    |       | %               |      |




**Note 1: Definition of Viewing Angle  $\theta_x$  and  $\theta_y$ :**

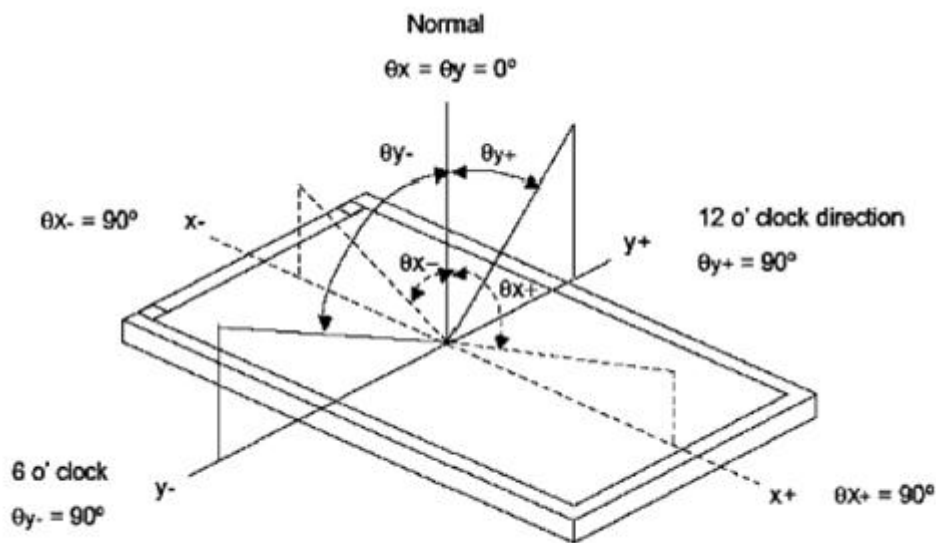

**Note 2: Definition of contrast ratio CR:**

$$CR = \frac{\text{Luminance of white state}}{\text{Luminance of black state}}$$


**Note 3: Definition of Response Time( $T_r$ ,  $T_f$ )**

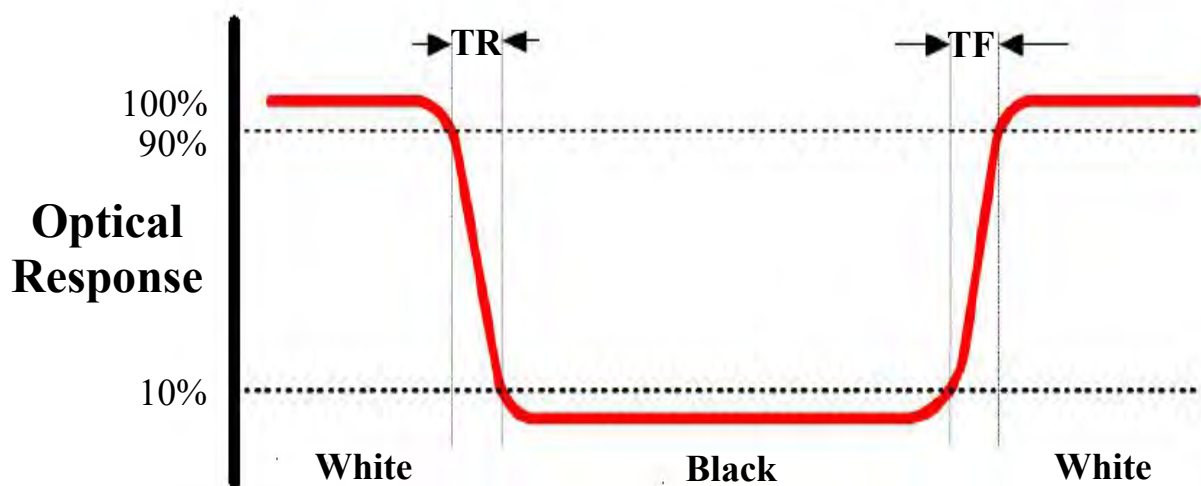


#### Note 4: Definition of Luminance

##### ①The Brightness Test Equipment Setup

Field=2° (As measuring “black” image, field=2° is the best testing condition)

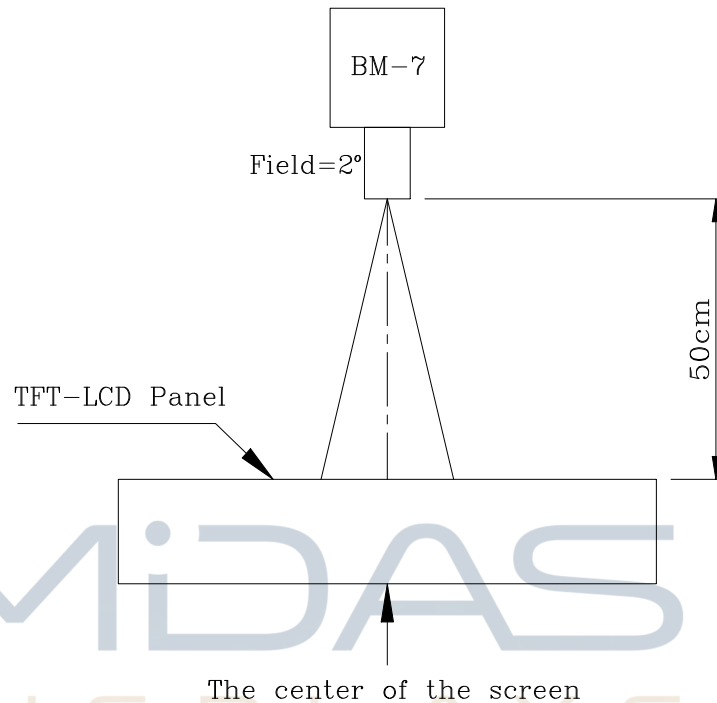


##### ②The Brightness Test Point Setup

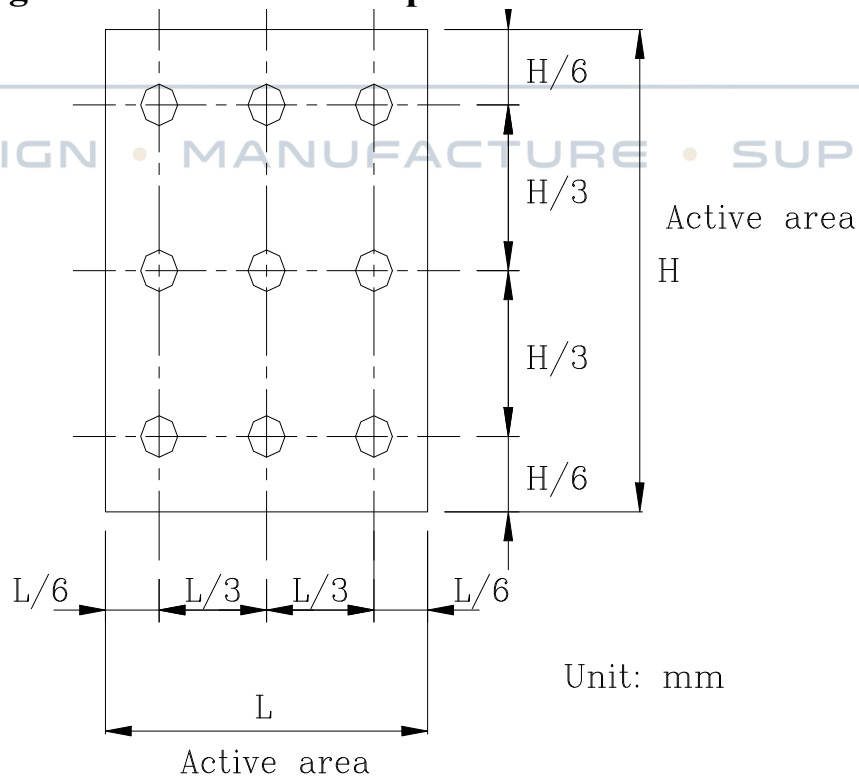

## 8. Timing Characteristics


### 8.1 Data input format

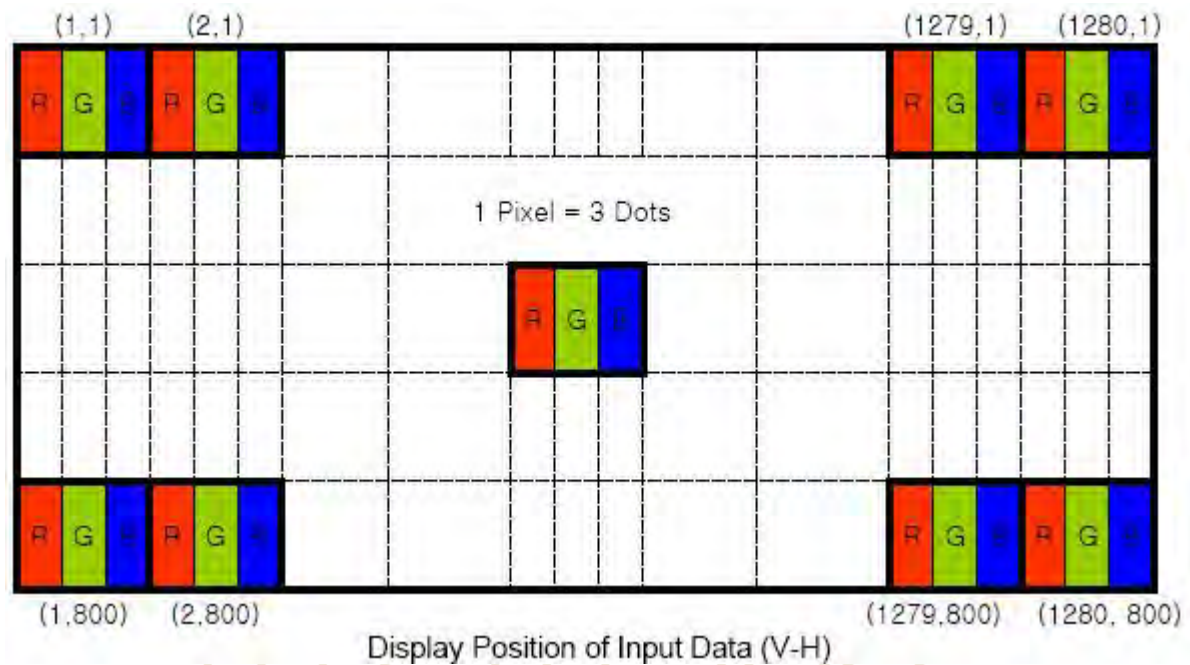

DESIGN • MANUFACTURE • SUPPLY


## 8.2 Signal timing

| ITEM                            | Symbol    |           | Min | Typ   | Max  | Unit      | Note |
|---------------------------------|-----------|-----------|-----|-------|------|-----------|------|
| CLK                             | Period    | $t_{CLK}$ | 4   |       | 4.44 | ns        |      |
|                                 | Frequency | -         |     | 450   | 500  | Mbps      |      |
| Hsync                           | Period    | $t_{HP}$  | -   | 1330  | -    | $t_{CLK}$ |      |
|                                 | Frequency | $f_H$     | -   | 48.72 | -    | KHz       |      |
| Vsync                           | Period    | $t_{VP}$  | -   | 812   | -    | $t_{HP}$  |      |
|                                 | Frequency | $f_V$     | -   | 60    | -    | Hz        |      |
| Horizontal Active Display Termi | Valid     | $t_{HV}$  | -   | 1280  | -    | $t_{CLK}$ |      |
|                                 | Total     | $t_{HP}$  | -   | 1330  | -    | $t_{CLK}$ |      |
| Vertical Active Display Termi   | Valid     | $t_{VV}$  | -   | 800   | -    | $t_{HP}$  |      |
|                                 | Total     | $t_{VP}$  | -   | 812   | -    | $t_{HP}$  |      |

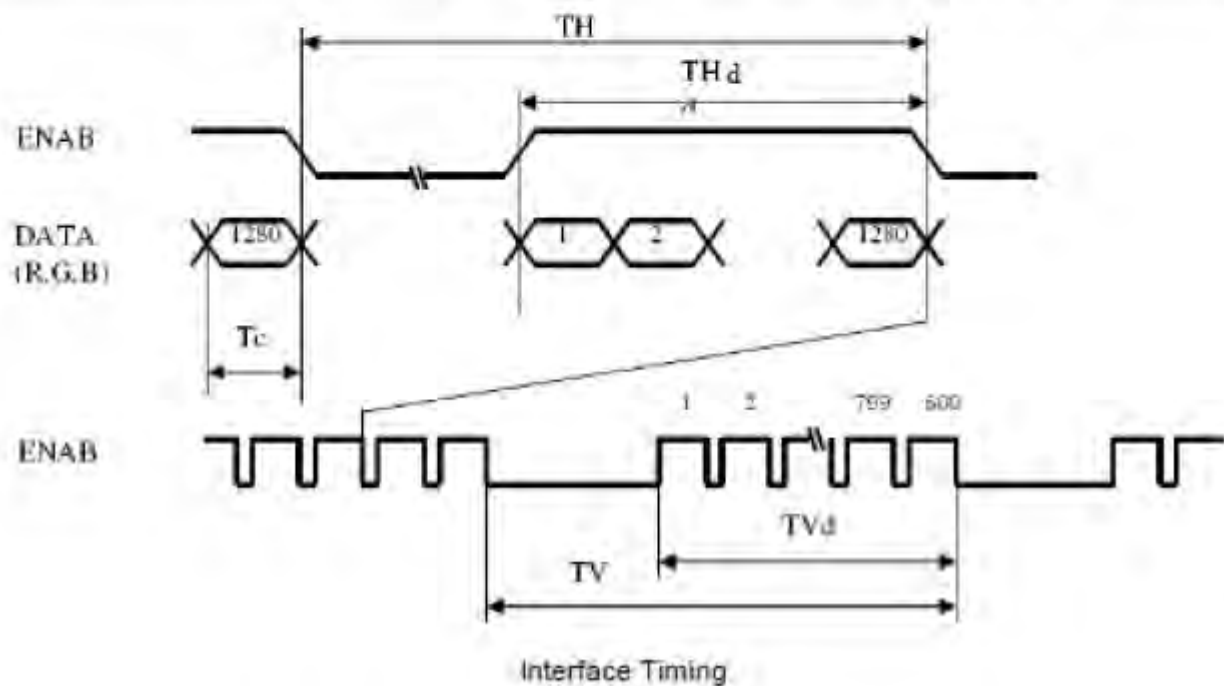

## 8.3 MIPI Rx Interface Timing Parameter

The specification of the MIPI Rx interface timing parameter is shown in Table 8.  
MIPI Rx Interface Timing Specification

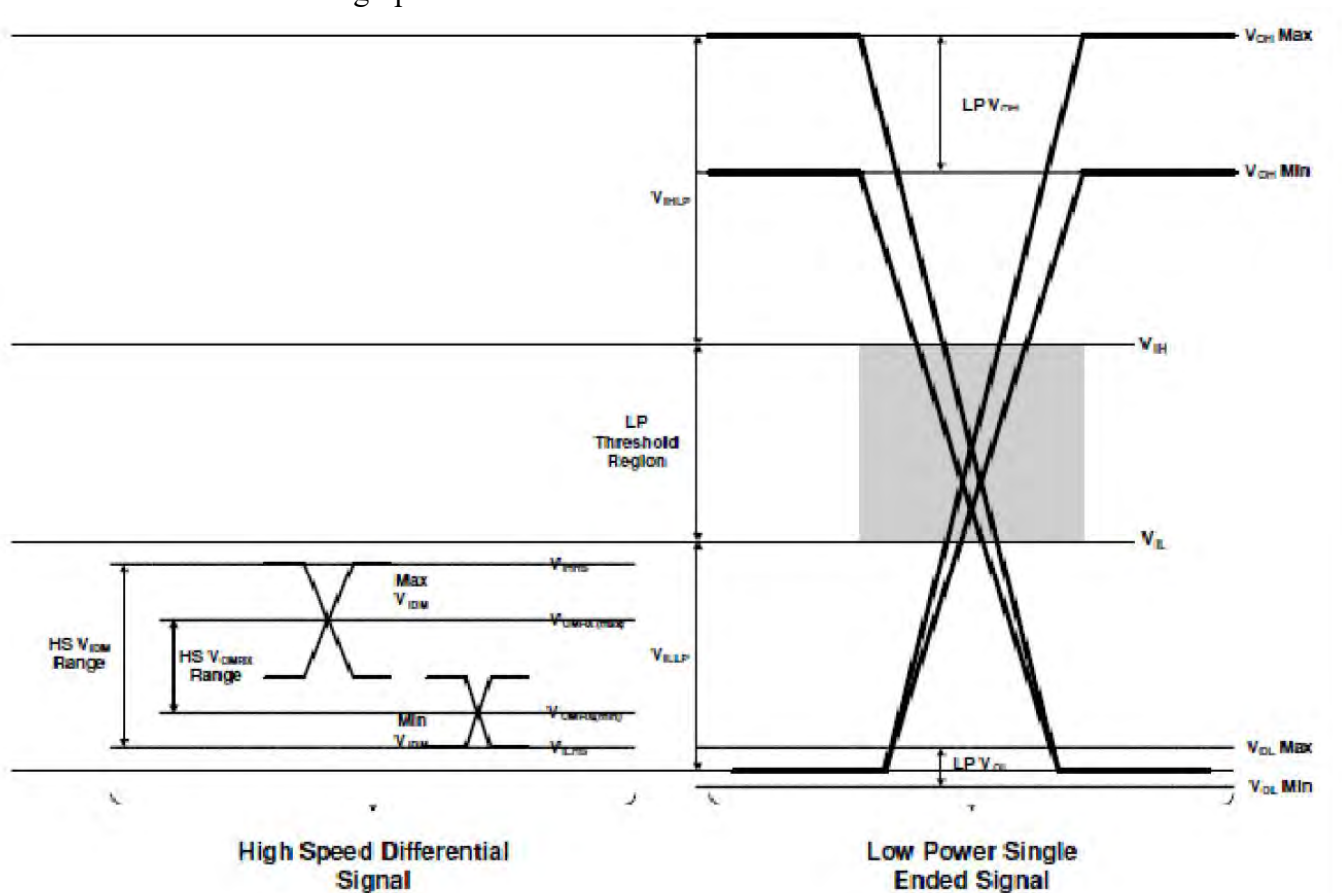


DESIGN • MANUFACTURE • SUPPLY

| MIPI Receiver Differential Input (DC Characteristics) |                                                |      |      |      |      |           |
|-------------------------------------------------------|------------------------------------------------|------|------|------|------|-----------|
| Symbol                                                | Description                                    | Min. | Typ. | Max. | Unit | Condition |
| BR <sub>MIPI</sub>                                    | Input data bit rate                            | 200  | -    | 1000 | Mbps |           |
| V <sub>CMRX</sub>                                     | Common-mode voltage(HS Rx mode)                | 70   | -    | 330  | mV   |           |
| V <sub>IDTH</sub>                                     | Differential input high threshold (HS Rx mode) | -    | -    | 70   | mV   |           |
| V <sub>IDTL</sub>                                     | Differential input low threshold (HS Rx mode)  | -70  | -    | -    | mV   |           |
| V <sub>IDM</sub>                                      | Differential input voltage range (HS Rx mode)  | 70   | -    | 500  | mV   |           |
| V <sub>IHHS</sub>                                     | Single-end input high voltage (HS Rx mode)     | -    | -    | 460  | mV   |           |
| V <sub>ILHS</sub>                                     | Single-end input low voltage (HS Rx mode)      | -40  | -    | -    | mV   |           |
| Z <sub>ID</sub>                                       | Differential input impedance                   | 80   | 100  | 125  | ohm  |           |
| V <sub>IHLP</sub>                                     | Logic 1 input voltage (LP Rx mode)             | 880  | -    | -    | mV   |           |
| V <sub>ILLP</sub>                                     | Logic 0 input voltage (LP Rx mode)             | -    | -    | 550  | mV   |           |
| VOH                                                   | Output high level (LP Tx mode)                 | 1.08 | 1.2  | 1.32 | V    |           |
| VOL                                                   | Output low level (LP Tx mode)                  | -50  | -    | 50   | mV   |           |

| MIPI Receiver Differential Input (DC Characteristics) |                                                     |      |      |      |      |                                                                                        |
|-------------------------------------------------------|-----------------------------------------------------|------|------|------|------|----------------------------------------------------------------------------------------|
| Symbol                                                | Description                                         | Min. | Typ. | Max. | Unit | Condition                                                                              |
| T <sub>MIN-RX</sub>                                   | Minimum pulse width response (LP Rx mode)           | 50   | -    | -    | ns   |                                                                                        |
| T <sub>LP-PULS E-TX</sub>                             | Pulse width of the LP exclusive-OR clock            | 50   | 55   | 58   | ns   | 1st clock pulse after STOP state or last clock pulse before STOP state/all other pulse |
| T <sub>RLP/TFLP</sub>                                 | 15%~85% rise time and fall time (LP Tx mode)        | -    | -    | 25   | ns   |                                                                                        |
| T <sub>REOT</sub>                                     | 30%~85% rise time and fall time of EOT (LP Tx mode) | -    | -    | 35   | ns   |                                                                                        |
| T <sub>LP-PER-TX</sub>                                | Period of the LP exclusive-OR clock                 | 90   | -    | -    | ns   |                                                                                        |
| T <sub>SETUP</sub>                                    | Data to clock setup time                            | 0.15 | -    | -    | UI   |                                                                                        |
| T <sub>HOLD</sub>                                     | Data to clock hold time                             | 0.15 | -    | -    | UI   |                                                                                        |

## 8.4 MIPI Rx Interface Timing Parameter

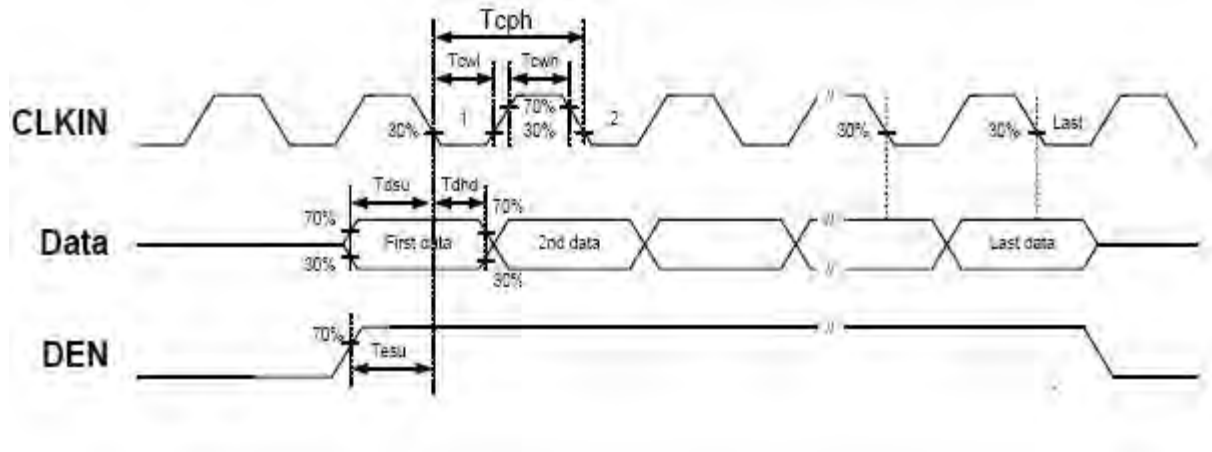

MIDAS  
DISPLAYS

DESIGN • MANUFACTURE • SUPPLY

## 9. Standard Specification for Reliability

### 9.1 Standard Specification for Reliability of LCD Module

| No | Test Item                                | Condition                                                                                                                     | Remarks                                                                                             |
|----|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| 1  | High Temperature Operation               | Ts = +70℃, 240 hours                                                                                                          | IEC60068-21:2007<br>GB2423.2-2008                                                                   |
| 2  | Low Temperature Operation                | Ta = -20℃, 240 hours                                                                                                          | IEC60068-2-1:2007<br>GB/2423.1-2008                                                                 |
| 3  | High Temperature Storage                 | Ta = +80℃, 240 hours                                                                                                          | IEC60068-21:2007<br>GB/2423.2-2008                                                                  |
| 4  | Low Temperature Storage                  | Ta = -30℃, 240 hours                                                                                                          | IEC60068-21:2007<br>GB/2423.1-2008                                                                  |
| 5  | Storage at High Temperature and Humidity | Ta = +60℃, 90% RH max,240hours                                                                                                | IEC60068-2-78 :2001<br>GB/T2423.3—2006                                                              |
| 6  | Thermal Shock (non-operation)            | -30℃ 30 min~+80℃ 30 min,<br>Change time:5min, 20 Cycle                                                                        | Start with cold temperature,<br>End with high temperature,<br>IEC60068-214:1984,<br>GB/2423.22-2002 |
| 7  | ESD                                      | C=150pF,R=330Ω,5point/panel<br>Air:±8Kv,5times;<br>Contact:±4Kv,5times<br>(Environment:15℃~35℃,<br>30%~60%.86Kpa~106Kpa)      | IEC61000-42:2001<br>GB/T17626.2-2006                                                                |
| 8  | Vibration Test                           | Frequency range:10~55Hz<br>Stroke:1.5mm<br>Sweep:10Hz~55Hz~10Hz<br>2 hours for each direction of X.Y.Z<br>(6 hours for total) | IEC60068-2-6:1982<br>GB/T2423.101995                                                                |
| 9  | Mechanical Shock (Non Op)                | Half Sine Wave60G<br>6ms, ±X,±Y,±Z<br>3times for each direction                                                               | IEC60068-2-27:1987<br>GB/T2423.5—1995                                                               |
| 10 | Package Drop Test                        | Height:80cm,<br>1corner,3 edges,6 surfaces                                                                                    | IEC60068-2-32:1990<br>GB/T2423.8—1995                                                               |

Note1: Ts is the temperature of panel's surface.

Note2: Ta is the ambient temperature of sample.

## 9.2 Testing Conditions and Inspection Criteria

For the final test, the testing sample must be stored at room temperature for 24 hours. After the tests listed in Table 9.2, standard specifications for reliability will be executed in order to ensure stability.

| No. | Item                | Test Model             | In section Criteria                                                                                                |
|-----|---------------------|------------------------|--------------------------------------------------------------------------------------------------------------------|
| 01  | Current Consumption | Refer To Specification | The current consumption should conform to the product specification.                                               |
| 02  | Contrast            | Refer To Specification | After the tests have been executed, the contrast must be larger than half of its initial value prior to the tests. |
| 03  | Appearance          | Visual inspection      | Defect free.                                                                                                       |

## 9.3 MTBF

|      |                                                                                                                                                                                                                                                                                           |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MTBF | Functions, performance, appearance, etc. shall be free from remarkable deterioration within 50,000 hours under ordinary operating and storage conditions room temperature ( $25\pm 5^{\circ}\text{C}$ ), normal humidity ( $50\pm 10\%$ RH), and in area not exposed to direct sun light. |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## 10. Specification of Quality Assurance

This standard of Quality Assurance confirms to the quality of LCD module products supplied by Midas.

### 10.1 Quality Test

Before delivering, the supplier should conduct the following tests to confirm the quality of products.

- Electrical-Optical Characteristics: According to the individual specification to test the product.
- Appearance Characteristics: According to the individual specification to test the product.
- Reliability Characteristics: According to the definition of reliability on the specification for testing products.

### 10.2 Delivery Test

Before delivering, the supplier should conduct the delivery test.

- Test method: According to MIL-STD105E.General Inspection Level II take a single Time.
- The defects classify of AQL as following:  
Major defect: AQL = 0.65  
Minor defect: AQL = 1.5  
Total defects: AQL = 1.5

### 10.3 Non-conforming Analysis & Feedback

#### 10.3.1 Non-conforming Analysis

- Purchaser should provide the data detail of non-conforming sample and the non-conforming.
- After receiving the data detail from purchaser, the analysis of non-conforming should be finished within two weeks.
- If the analysis can't be finished on time, supplier must notice purchaser 3 days in advance.

#### 10.3.2 Disposition of non-conforming

- If any product defect be found during assembling, supplier must change the good for every defect after confirmation.
- Both supplier and customer should analyze the reason and discuss the disposition of non-conforming when the reason of nonconforming is not sure.



## 10.4 Agreement items


Both parties should negotiate together when the following problems happen.

- There is any problem of standard of quality assurance, and both sides should agree that it must be modified.
- There is any argument item which does not record in the standard of quality assurance.
- Any other special problem.

## 10.5 Standard of The Product Appearance Test

### 10.5.1 Manner of appearance test

- The test must be under  $20W \times 2$  or  $40W$  fluorescent light, and the distance of view must be at  $30 \pm 5cm$ .
- When test the model of transmissive product must add the reflective plate.
- The test direction is base on around  $10^\circ$  of vertical line.
- Temperature:  $25 \pm 5^\circ C$  Humidity:  $60 \pm 10\% RH$

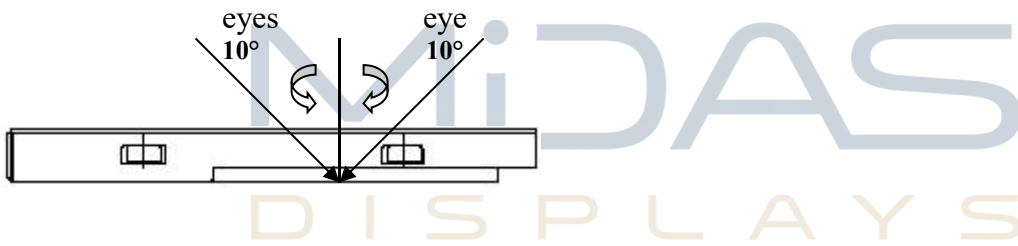


---

DESIGN • MANUFACTURE • SUPPLY



- Definition of area:

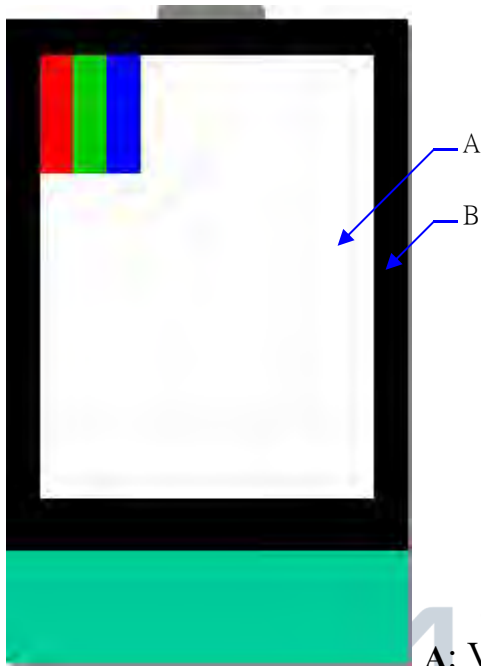

A: Viewing area B: Outside viewing area



## 10.5.2 Basic principle



- When the standard can not be described, AQL will be applied.
- The sample of the lowest acceptable quality level must be negotiated by both supplier and customer when any dispute happened.
- New item must be added on time when it is necessary.




DESIGN • MANUFACTURE • SUPPLY



## 10.6 Inspection Specification



| NO.                     | Item                                                                        | Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | AQL             |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
|-------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------|------------------|-----------------|-------------------------|-----------------|-------------------------|------------|-------------------------|-----|---------------|-----------|-----|
| 01                      | Electrical Testing                                                          | 1.1 Missing vertical, horizontal segment, segment contrast defect.<br>1.2 Missing character, dot or icon.<br>1.3 Display malfunction.<br>1.4 No function or no display.<br>1.5 Current consumption exceeds product specifications.<br>1.6 LCD viewing angle defect.<br>1.7 Mixed product types.<br>1.8 Flicker                                                                                                                                                                                                                                                                                                                                       | 0.65            |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| 02                      | Black or White spots or Bright spots or Color spots on LCD (Display only)   | 2.1 White and black or color spots on display < 0.25mm, no more than one spots.<br>2.2 Densely spaced: No more than three spots within 3mm.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1.5             |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| 03                      | LCD and Touch Panel black spots, white spots, contamination (non – display) | 3.1 Round type: As following drawing<br>$\Phi = (X+Y) / 2$ <div></div> <table><thead><tr><th>Size(mm)</th><th>Acceptable Q'ty</th></tr></thead><tbody><tr><td><math>\Phi \leq 0.10</math></td><td>Accept no dense</td></tr><tr><td><math>0.10 &lt; \Phi \leq 0.20</math></td><td>1</td></tr><tr><td><math>0.20 &lt; \Phi \leq 0.25</math></td><td>1</td></tr><tr><td><math>0.25 &lt; \Phi \leq 0.30</math></td><td>1</td></tr><tr><td><math>0.30 &lt; \Phi</math></td><td>0</td></tr></tbody></table> <p>* Densely spaced: No more than two spots within 3mm.</p> | Size(mm)        | Acceptable Q'ty | $\Phi \leq 0.10$ | Accept no dense | $0.10 < \Phi \leq 0.20$ | 1               | $0.20 < \Phi \leq 0.25$ | 1          | $0.25 < \Phi \leq 0.30$ | 1   | $0.30 < \Phi$ | 0         | 1.5 |
|                         |                                                                             | Size(mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Acceptable Q'ty |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| $\Phi \leq 0.10$        | Accept no dense                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| $0.10 < \Phi \leq 0.20$ | 1                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| $0.20 < \Phi \leq 0.25$ | 1                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| $0.25 < \Phi \leq 0.30$ | 1                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| $0.30 < \Phi$           | 0                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
|                         |                                                                             | 3.2 Line type: (As following drawing) <div></div> <table><thead><tr><th>Length(mm)</th><th>Width(mm)</th><th>Acceptable Q'ty</th></tr></thead><tbody><tr><td>---</td><td><math>W \leq 0.02</math></td><td>Accept no dense</td></tr><tr><td><math>L &lt; 2.5</math></td><td><math>W &lt; 0.08</math></td><td>1</td></tr><tr><td>---</td><td><math>0.08 \leq W</math></td><td>Rejection</td></tr></tbody></table> <p>* Densely spaced: No more than two lines within 3mm.</p>                                                                                       | Length(mm)      | Width(mm)       | Acceptable Q'ty  | ---             | $W \leq 0.02$           | Accept no dense | $L < 2.5$               | $W < 0.08$ | 1                       | --- | $0.08 \leq W$ | Rejection | 1.5 |
| Length(mm)              | Width(mm)                                                                   | Acceptable Q'ty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| ---                     | $W \leq 0.02$                                                               | Accept no dense                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| $L < 2.5$               | $W < 0.08$                                                                  | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |
| ---                     | $0.08 \leq W$                                                               | Rejection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                 |                 |                  |                 |                         |                 |                         |            |                         |     |               |           |     |

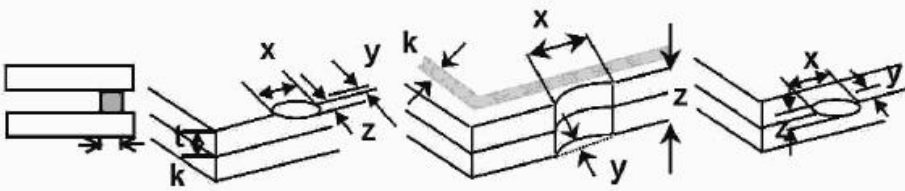

| NO.                                                                                 | Item              | Criterion                                                                                                                                                                                                                                    |                         |                 | AQL |
|-------------------------------------------------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------|-----|
| 04                                                                                  | Polarizer bubbles | If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction                                                                                                                             | Size $\Phi$ (mm)        | Acceptable Q'ty | 1.5 |
|                                                                                     |                   |                                                                                                                                                                                                                                              | $\Phi \leq 0.30$        | Accept no dense |     |
|                                                                                     |                   |                                                                                                                                                                                                                                              | $0.30 < \Phi \leq 0.50$ | 0               |     |
|                                                                                     |                   |                                                                                                                                                                                                                                              | $0.50 < \Phi \leq 1.00$ | 0               |     |
|                                                                                     |                   |                                                                                                                                                                                                                                              | $1.00 < \Phi$           | 0               |     |
|                                                                                     |                   |                                                                                                                                                                                                                                              | Total Q'ty              | 0               |     |
| 05                                                                                  | Scratches         | Follow NO.3 -2 Line Type.                                                                                                                                                                                                                    |                         |                 |     |
| 06                                                                                  | Chipped glass     | Symbols:<br>x: Chip length    y: Chip width    z: Chip thickness<br>k: Seal width    t: Glass thickness    a: LCD side length<br>L: Electrode pad length<br>6.1 General glass chip:<br>6.1.1 Chip on panel surface and crack between panels: |                         |                 | 1.5 |
|                                                                                     |                   |                                                                                                                                                           |                         |                 |     |
|                                                                                     |                   | z: Chip thickness                                                                                                                                                                                                                            | y: Chip width           | x: Chip length  |     |
|                                                                                     |                   | $Z \leq 1/2t$                                                                                                                                                                                                                                | Not over viewing area   | $x \leq 1/8a$   |     |
|                                                                                     |                   | $1/2t < z \leq 2t$                                                                                                                                                                                                                           | Not exceed $1/3k$       | $x \leq 1/8a$   |     |
|                                                                                     |                   | ☉ Unit:    mm<br>☉ If there are 2 or more chips, x is the total length of each chip<br>6.1.2 Corner crack:                                                                                                                                   |                         |                 |     |
|                                                                                     |                   |                                                                                                                                                           |                         |                 |     |
|                                                                                     |                   | z: Chip thickness                                                                                                                                                                                                                            | y: Chip width           | x: Chip length  |     |
|                                                                                     |                   | $Z \leq 1/2t$                                                                                                                                                                                                                                | Not over viewing area   | $x \leq 1/8a$   |     |
|                                                                                     |                   | $1/2t < z \leq 2t$                                                                                                                                                                                                                           | Not exceed $1/3k$       | $x \leq 1/8a$   |     |
| ☉ Unit:    mm<br>☉ If there are 2 or more chips, x is the total length of each chip |                   |                                                                                                                                                                                                                                              |                         |                 |     |
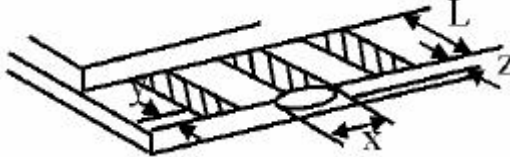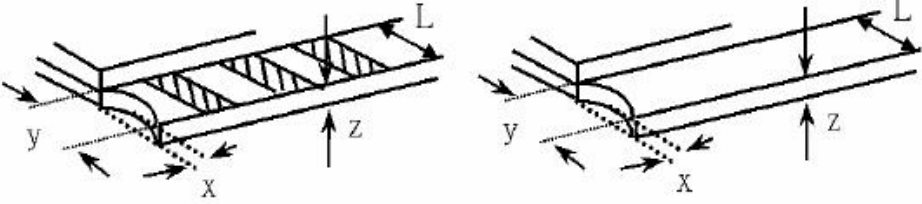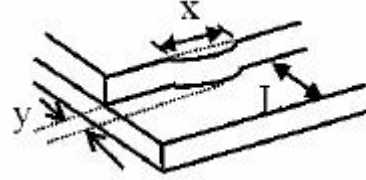
| NO.                   | Item           | Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | AQL           |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |
|-----------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------|-------------------|-----------------------|---------------|----------------|---------------|----------------|-------------------|------------|---------------|----------------|----------|-----------|---------------|------------|-----|
| 07                    | Glass crack    | <p>Symbols:<br/>x: Chip length    y: Chip width    z: Chip thickness<br/>k: Seal width    t: Glass thickness    a: LCD side length<br/>L: Electrode pad length</p> <p>7.2 Protrusion over terminal:<br/>7.2.1 Chip on electrode pad:</p>  <table><tr><td>y: Chip width</td><td>x: Chip length</td><td>z: Chip thickness</td></tr><tr><td><math>y \leq 0.5\text{mm}</math></td><td><math>x \leq 1/8a</math></td><td><math>0 &lt; z \leq t</math></td></tr></table> <p>7.2.2<br/>Non-conductive portion:</p>  <table><tr><td>y: Chip width</td><td>x: Chip length</td><td>z: Chip thickness</td></tr><tr><td><math>y \leq L</math></td><td><math>x \leq 1/8a</math></td><td><math>0 &lt; z \leq t</math></td></tr></table> <p>⊙ If there chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.<br/>⊙ If the product will be heat sealed by the customer, the alignment mark must not be damaged.</p> <p>7.2.3 Substrate protuberance and internal crack</p>  <table><tr><td>y: width</td><td>x: length</td></tr><tr><td><math>y \leq 1/3L</math></td><td><math>X \leq a</math></td></tr></table> | y: Chip width | x: Chip length | z: Chip thickness | $y \leq 0.5\text{mm}$ | $x \leq 1/8a$ | $0 < z \leq t$ | y: Chip width | x: Chip length | z: Chip thickness | $y \leq L$ | $x \leq 1/8a$ | $0 < z \leq t$ | y: width | x: length | $y \leq 1/3L$ | $X \leq a$ | 1.5 |
| y: Chip width         | x: Chip length | z: Chip thickness                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |
| $y \leq 0.5\text{mm}$ | $x \leq 1/8a$  | $0 < z \leq t$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |
| y: Chip width         | x: Chip length | z: Chip thickness                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |
| $y \leq L$            | $x \leq 1/8a$  | $0 < z \leq t$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |               |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |
| y: width              | x: length      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |               |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |
| $y \leq 1/3L$         | $X \leq a$     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |               |                |                   |                       |               |                |               |                |                   |            |               |                |          |           |               |            |     |

| NO. | Item               | Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | AQL                                      |
|-----|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| 08  | Cracked glass      | No crack is allowed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1.5                                      |
| 09  | Backlight elements | 9.1 Illumination source flickers when lit.<br>9.2 Spots or scratches that appear when lit must be judged.<br>Using LCD spot, lines and contamination standards.<br>9.3 Backlight doesn't light or color is wrong.                                                                                                                                                                                                                                                                                                                                                                                        | 1.5<br>1.5<br>0.65                       |
| 10  | Bezel              | No scratches with $W > 0.1$ and $Length > 2.5mm$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1.5                                      |
| 11  | PCB、COB            | 11.1 COB seal may not have pinholes larger than 0.2mm or contamination.<br>11.2 COB seal surface may not have pinholes through to the IC.<br>11.3 The height of the COB should not exceed the height indicated in the assembly diagram.<br>11.4 There may not be more than 2mm of sealant outside the seal area on PCB. And there should be no more than three places.<br>11.5 Parts on PCB must be the same as on the production characteristic chart, There should be no wrong parts, missing parts or excess parts.<br>11.6 The jumper on the PCB should conform to the product characteristic chart. | 1.5<br>1.5<br>1.5<br>1.5<br>0.65<br>0.65 |
| 12  | FPC                | FPC damage per IPC guidelines.(IPC-A-610)<br>Nicks or damage along the edges of the flexible printed circuitry and cutouts, providing the penetration does not exceed 50% of the distance from the edge to the nearest conductor to 2.5mm[0.1in], Whichever is less.                                                                                                                                                                                                                                                                                                                                     | 1.5                                      |
| 13  | Soldering          | 13.1 No cold solder joints, missing solder connections, oxidation or icicle.<br>13.2 No short circuits in components on PCB or FPC.<br>13.3 Soldering per IPC guidelines.(IPC-A-610)                                                                                                                                                                                                                                                                                                                                                                                                                     | 1.5<br>0.65                              |

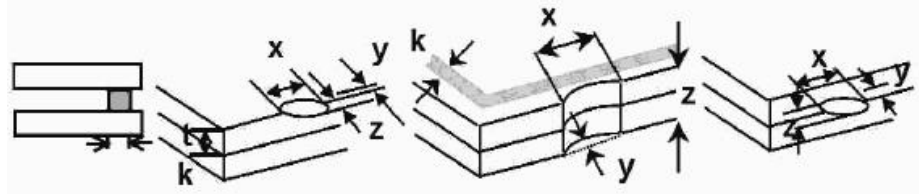

| NO.               | Item                                   | Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | AQL               |               |                |            |                                        |               |                   |               |                |            |                                        |               |     |
|-------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|----------------|------------|----------------------------------------|---------------|-------------------|---------------|----------------|------------|----------------------------------------|---------------|-----|
| 14                | Touch Panel<br>Chipped<br>glass        | <p>Symbols:<br/>x: Chip length      y: Chip width      z: Chip thickness<br/>k: Seal width      t: Touch Panel Total thickness      a: LCD side length<br/>L: Electrode pad length</p> <p>14.1 General glass chip:<br/>14.1.1 Chip on panel surface and crack between panels:</p>  <table><tr><td>z: Chip thickness</td><td>y: Chip width</td><td>x: Chip length</td></tr><tr><td><math>Z \leq t</math></td><td><math>\leq 1/2 k</math> and not over viewing area</td><td><math>x \leq 1/8a</math></td></tr></table> <p>⊙ Unit: mm<br/>⊙ If there are 2 or more chips, x is the total length of each chip</p> <p>14.1.2 Corner crack:</p>  <table><tr><td>z: Chip thickness</td><td>y: Chip width</td><td>x: Chip length</td></tr><tr><td><math>z \leq t</math></td><td><math>\leq 1/2 k</math> and not over viewing area</td><td><math>x \leq 1/8a</math></td></tr></table> <p>⊙ Unit: mm<br/>⊙ If there are 2 or more chips, x is the total length of each chip</p> | z: Chip thickness | y: Chip width | x: Chip length | $Z \leq t$ | $\leq 1/2 k$ and not over viewing area | $x \leq 1/8a$ | z: Chip thickness | y: Chip width | x: Chip length | $z \leq t$ | $\leq 1/2 k$ and not over viewing area | $x \leq 1/8a$ | 1.5 |
| z: Chip thickness | y: Chip width                          | x: Chip length                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                   |               |                |            |                                        |               |                   |               |                |            |                                        |               |     |
| $Z \leq t$        | $\leq 1/2 k$ and not over viewing area | $x \leq 1/8a$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                   |               |                |            |                                        |               |                   |               |                |            |                                        |               |     |
| z: Chip thickness | y: Chip width                          | x: Chip length                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                   |               |                |            |                                        |               |                   |               |                |            |                                        |               |     |
| $z \leq t$        | $\leq 1/2 k$ and not over viewing area | $x \leq 1/8a$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                   |               |                |            |                                        |               |                   |               |                |            |                                        |               |     |

| NO.                | Item                                          | Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | AQL                          |                 |                 |                 |                    |   |                    |   |           |   |     |
|--------------------|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-----------------|-----------------|-----------------|--------------------|---|--------------------|---|-----------|---|-----|
| 15                 | Touch Panel(Fish eye、dent and bubble on film) | <table> <tr> <th>SIZE(mm)</th> <th>Acceptable Q'ty</th> </tr> <tr> <td><math>\Phi \leq 0.2</math></td> <td>Accept no dense</td> </tr> <tr> <td><math>0.2 &lt; D \leq 0.4</math></td> <td>5</td> </tr> <tr> <td><math>0.4 &lt; D \leq 0.5</math></td> <td>2</td> </tr> <tr> <td><math>0.5 &lt; D</math></td> <td>0</td> </tr> </table> <div>   </div> | SIZE(mm)                     | Acceptable Q'ty | $\Phi \leq 0.2$ | Accept no dense | $0.2 < D \leq 0.4$ | 5 | $0.4 < D \leq 0.5$ | 2 | $0.5 < D$ | 0 | 1.5 |
| SIZE(mm)           | Acceptable Q'ty                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                              |                 |                 |                 |                    |   |                    |   |           |   |     |
| $\Phi \leq 0.2$    | Accept no dense                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                              |                 |                 |                 |                    |   |                    |   |           |   |     |
| $0.2 < D \leq 0.4$ | 5                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                              |                 |                 |                 |                    |   |                    |   |           |   |     |
| $0.4 < D \leq 0.5$ | 2                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                              |                 |                 |                 |                    |   |                    |   |           |   |     |
| $0.5 < D$          | 0                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                              |                 |                 |                 |                    |   |                    |   |           |   |     |
| 16                 | Touch Panel Newton ring                       | Newton ring dimension $\leq 1/2$ touch panel area and not affect font and line distortion( $\leq 2.5\%$ ) , it is acceptable.                                                                                                                                                                                                                                                                                                                                                                                            | 1.5                          |                 |                 |                 |                    |   |                    |   |           |   |     |
| 17                 | Touch Panel Linearity                         | Less than 1.5% is acceptable.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.5                          |                 |                 |                 |                    |   |                    |   |           |   |     |
| 18                 | LCD Ripple                                    | Touch the touch panel , can not see the LCD ripple.<br>Pen: R 1.0mm silicon rubber.<br>Operation Force: 80g                                                                                                                                                                                                                                                                                                                                                                                                              | 1.5                          |                 |                 |                 |                    |   |                    |   |           |   |     |
| 19                 | General appearance                            | 19.1 Pin type must match type in specification sheet.<br>19.2 LCD pin loose or missing pins.<br>19.3 Product packaging must the same as specified on packaging specification sheet.<br>19.4 Product dimension and structure must conform to product specification sheet.<br>19.5 Product packaging shall be by trays sized to protect TFT and FPC cable.<br>19.6 Cable shall not be bent during transportation.<br>19.7 Top tray must be empty.                                                                          | 0.65<br>0.65<br>0.65<br>0.65 |                 |                 |                 |                    |   |                    |   |           |   |     |

# 11. Handling Precaution

## 11.1 Handling of LCM

- Avoid external shock.
- Don't apply excessive force on the surface.
- Liquid in LCD is hazardous substance, do not lick or swallow. When the liquid makes contact with your hand, skin, cloth, etc., wash it thoroughly and immediately.
- Don't operate it above the absolute maximum rating.
- Don't disassemble the LCM.
- The operators should wear protections whenever he/she comes into contact with the module. Never touch any of the conductive parts such as the LSI pads, the copper leads on the PCB and the interface terminals with any parts of the human body.
- The modules should be kept in antistatic bags or other containers resistant to static for storage.
- The module is coated with a film to protect the display surface, be careful when peeling off this protective film since static electricity may be generated.

## 11.2 Storage

- Store it in an ambient temperature of  $25\pm 10^{\circ}\text{C}$ , and in a relative humidity of  $50\pm 10\%\text{RH}$ . Don't expose to sunlight or fluorescent light.
- Store it in a clean environment, free from dust, active gas, and solvent.
- Store it in anti-static electricity container.
- Store it without any physical load.

## 11.3 Soldering

- Use only soldering irons with proper grounding and no leakage.
- Iron: no higher than  $280\pm 10^{\circ}\text{C}$  and less than 3 sec during hand soldering.
- Rewiring: no more than 2 times.

